4.8.2 Aviation Technology Paper 2 (450/2)

STATION 1

INSTRUCTIONS

Figure 1 shows an exploded view of a hydraulic system hand pump. In the space provided:

- (a) sketch in good proportion a typical pictorial view of the hand pump.
- (b) name four visible parts on Figure 1 after assembly.

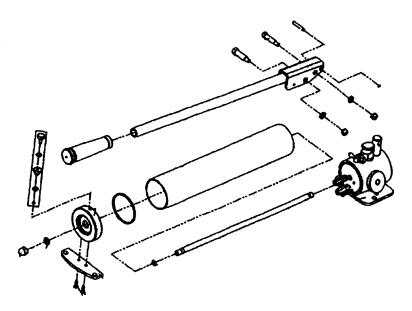


Figure 1

(8 marks) (2 marks)

INSTRUCTIONS

Using the tools, equipment and materials provided, fabricate the aircraft VHF radio compartment tray as shown in Figure 2. (10 marks)

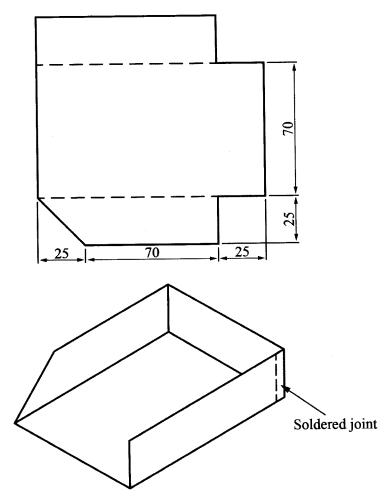


Figure 2

111/2	RUC	HONS	9
Usin	g the m	aultimeter and assembly 'K' provided, perform the following tasks:	(1 mark)
(a)	(i)	Set the multimeter to AC – 220–250 volts.	
	(ii)	Plug assembly 'K' to the power source. Let the examiner check your work.	0
(b)	Selec	et the main source and component 'A' to 'On' position. Measure and record the s:	voltage (1 mark)
	(i)	T_1 and T_2	SE
		Voltage	2
	(ii)	T_1 and T_6	at
		Voltage	
		Switch of component A.	S
(c)	Conn	ect terminals T_5 and T_4 to points 1 and 2 respectively on component 'C'.	(3 marks)
	(i)	Measure and record voltage across terminal T_2 and point 2.	2 T
		Voltage	
	(ii)	Select component 'A' to On position. Record the observations.	3
		Observations	0
	(iii)	Switch 'off' component 'A'. Replace terminal T_5 with T_6 . Select component position and record the observations.	'A' to 'On'
		Observations	0
	(iv)	Measure and record voltage across terminal T_1 and T_6 .	
		Voltage	3
-	(v)	Select component 'A' to off position. Disconnect terminals T ₄ and T ₆ from poon component 'C'. Let the examiner check your work.	pints 1 and 2

(d)	State:		(3 marks)
	(i)	The reasons for the observations in c(i), (ii) and c(iii).	
		Reasons	<u></u>
	(ii)	Two systems where the sytem is applicable on an aircraft electrical system.	9
		Systems 1	9
(e)	Ident	2ify components A, B, C and D on assembly 'K'.	(2 marks
	Com	ponents A	**
		В	<u></u>
		C	S
		D	9
			ht
			m:
			FZ
			nloaded F
		-	Noa
			5

ng part l	abelled 'I	E' and the precision tools provided, perform the	e following tasks:	(2 marks)
(i)	Identify	y part 'E'		0
	Identifi	cation		
(ii)	State th	ne type		
	Туре			
(iii)	Give th	e use:		380
	Use			
(iv)	State th	ne importance of taper angle.		ati
	Taper a	ngle importance		
Take	the meas	urements and complete table 1.		(6 marks)
		Table 1		to
ITE	EM	DESCRIPTION OF MEASUREMENT	MEASUREMEN	T
(i)		External diameter of outer race.		2:
(ii)		Width of outer race.		
(iii)		Bore diameter.		12
(iv)		Taper Angle.		
(v)		Thickness of the face.		0
(v)		Gap between inner and outer race.		9
State	four reje	ction criteria for part E criteria.		(2 marks)
(i)	•••••		•••••	
(ii)				<u></u>
(iii)				5
(iv)				

Usin	g tools	and component 'F' provided, perform the following tasks:-	Ö
(a)	Stud	y the tool labelled 1 and identify:	(2 marks)
	(i)	Name of the tool	
	(ii)	Use of the tool	
	(iii)	Maintenance check required	65
	(iv)	Туре	~
(b)	Study	y component 'F' and identify:	(1½ marks)
	(i)	Component	Ø
	(ii)	Туре	
	(iii)	System applicable	
(c)	Dism	antle component 'F'.	tt
	(i)	Identify parts G, H, J, K and L.	(2½ marks)
		G	
		H	
		J	
		K	
		L	
	(ii)	State the use of parts painted white and blue.	(1 mark)
		White	(0)
		Blue	

	(iii)	Examine parts G, J, K and L and identify the maintenance checks for each.	(2 marks)
		Part G	
		· J	<u>6</u>
		K	
		L	
(d)	Reco	rd two failure indicators for component 'F' during engine run.	(1 mark)
	Indic	ators:	45
	(i)		
	(ii)	······································	
		STATION 6	+
INST	ruci	TIONS	a
Hein	a the to	ols and instruments labelled M and N, perform the following tasks:-	
		•	80 1
(a)	•	the instruments 'M' and 'N'. Record the observations.	(1 mark)
	Obse	rvations:	¹
	M		
	N		
(b)		ove the instruments cover. Study the mechanisms and operations of each and artions b(i) to b(iv).	nswer (8 marks)
	(i)	State principle of operation.	Щ
		M	O
		N	9
	(ii)	Identify operating mechanism	70
	(11)		O
		M	
		N	
	(iii)	Determine the sensitivity	0
	-	M	
		N	

	(iv)	Identify and s	state the function of fo	ur common parts.	
		Part:		Function:	
		1			
		2			
		3			
		4			
	(v)		trument grouping		sche
(c)	State befo			carried on instruments 'M	
	Che	cks:			S
	(i)				
	(ii)				
					8
					Ö
					L.
					7
					e
					36
			-		0
					ownloaded F

Usin	g the to	ols and component P provided, perform the following tasks:-	50
(a)	Study	y component 'P and identify:	(2 marks)
	(i)	The component	
	(ii)	Component type	
	(iii)	System where applicable	<u> </u>
	(iv)	Type of aircraft where used	<u> </u>
(b)	(i)	Dismantle the component P. Let the examiner check your work.	(1 mark)
	(ii)	Identify parts painted white, blue, red and green.	(2 marks)
		White	
		Blue	
		Red	7
		Green	
	(iii)	Identify four defects on component 'P'	(2 marks)
		Defects:	Q
	(iv)	Assemble component 'P'. Let the examiner check your work.	(1 mark)
	(c)	Give four routine checks to be carried on component P.	(2 marks)
		Routine checks:	oade
			Vnloë

Usin	g the m	aterial labelled 'Q' and hardware labelled 'R', perform the following tasks:-	5
(a)	Study	y the structure of material 'Q' and answer question a(i) to a(iii).	(4 marks)
	(i)	Identify the material.	
		Material	9
	(ii)	State the reason for use in aircraft construction.	þ
		Reason	2
	(iii)	Sketch and label the cross section through the material in the space below.	Ka
(b)	Study	hardware 'R' and answer questions b(i) to b(iii).	(6 marks)
	(i)	Identify the hardware.	10
		Hardware	
	(ii)	State the condition of the hardware.	9
		Condition	
	(iii)	Sketch and label the external thread profile in the space below.	•
			Fror
			H
			70
			(A)
			0
		-	Ö
			ownloade

INSTRUCTIONS

Using the airport model labelled 'S', aircraft model call sign N123QZ labelled T and tower instructions as shown in table 2, perform the following tasks.

(a) Demonstrate and explain to the examiner the procedure of taxing call sign N123QZ from apron to scenarios, A, B, C and D. (8 marks)

TABLE 2

Scenario	Tower Instructions
Α	NOVEMBER 123QZ Runway 16, taxi via Alpha
В	NOVEMBER 123QZ Runway 24, taxi via Alpha 2, Charlie and Bravo. Hold short runway 34.
С	NOVEMBER 123QZ Runway 34, taxi via Alpha.
D	NOVEMBER, 123QZ, line up and wait Runway 6, via Alpha and Bravo cross runway 6

b)	List four facilities at the airport which guide the aircraft pilot during taxing.	(2 marks)
	Facilities	7
	1	• •
	1	
	2	
	2	
	3	
	3	
	4	
	4	

Using	g the ma	aterials and tools provided, perform the following tasks:	9
(a)	Weigl	parts labelled 'U' and 'V' and record the weight.	(2 marks)
	Part "	U'	
	Part "	V'	
(b)	(i)	Fill beaker labelled 'N' with water. Position the beaker on top of a stool. Set to graduated cylinder labelled 'X' at the spout of the beaker. Immerse part 'U' to beaker 'W'. Take and record the volume of water displaced by part U.	
		Volume	
	(ii)	Repeat b(i) and with part 'V'. Take and record the volume of water displaced 'V'. Volume	(1 mark)
(c)	(i)	Relate observations in a(i) and a(ii).	(2½ marks)
		Relationship	+
	(ii)	Relate observations in b(i) and b(ii).	n:
		Relationship	
	(iii)	State the principle from the observations in a(i) (ii) and b(i), (ii)	1 F
		Principle	
	(iv)	State two applications of the principle in theory of flight.	O
		Applications 1.	0
(d)		rmine the lift of aircraft model labeled Z flying at 500 kph at sea level if the lift fficient is 0.87.	(3½ marks)