3.21 DRAWING AND DESIGN (449)

3.21.1 Drawing and Design Paper 1 (449/1)


SECTION A (50 marks)

Answer all the questions in this section on the answer sheet provided.


1	(a)	Write the following in full as applied in industrial training:			
		(i)	TVET;		
		(ii)	NITA;		
		(iii)	T.T.I.	(3 marks)	
	(b)	State t	wo uses of a beam compass.	(1 mark)	
2	(a)	Define	the following terms as used in the design process:	(4 marks)	
		(i)	primary objective;		
		(ii)	secondary objective;		
		(iii)	design brief;		
		(iv)	prototype.		
	(b)	(b) With the aid of sketches, describe three types of dimensions in techni		ing. (3 marks)	
3	State one use of each of the following computer components:			(2 marks)	
	(i)	keyboard;			
	(ii)				
	(iii)				
	(iv) hard disk.				
4	Constr	Construct a triangle of perimeter 165 mm whose sides are in the ratio of 3:5:6. (4 marks)			



- 5 (a) List **four** factors to consider when lettering. (2 marks)
 - (b) State **three** effects of poor disposal of engineering materials to the environment. (3 marks)
- **Figure 1** shows a block drawn in isometric projection. Sketch in good proportion the orthographic views of the block in first angle projection. (7 marks)

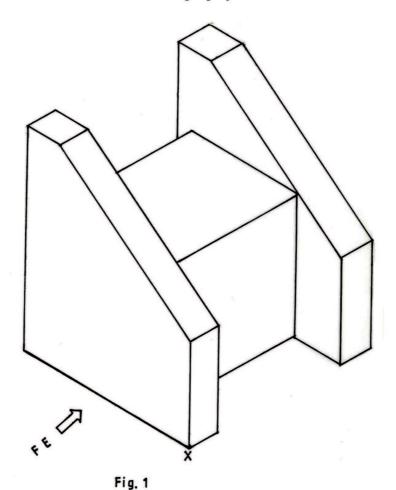

7 Figure 2 shows three views of a block drawn in third angle projection.

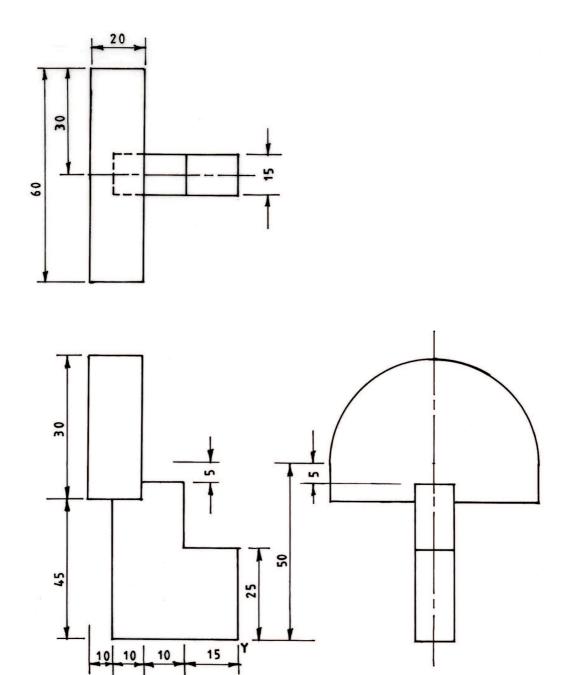

On the isometric grid paper provided, sketch the pictorial view of the block taking "Y" as the lowest point.


(6 marks)




Fig. 2

8 Construct a scale of 10:9 and draw **figure 3** using the scale.

(5 marks)



9 An equilateral triangular prism is intersected by a cylinder at right angles as shown in figure 4.

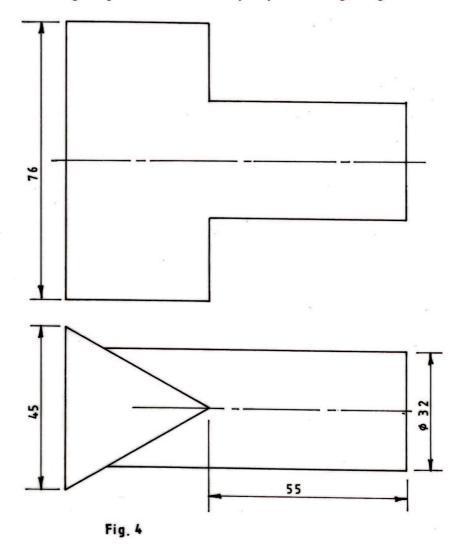

Draw the line of intersection.

(5 marks)



10 Figure 5 shows views of two parts of a block drawn in first angle projection.

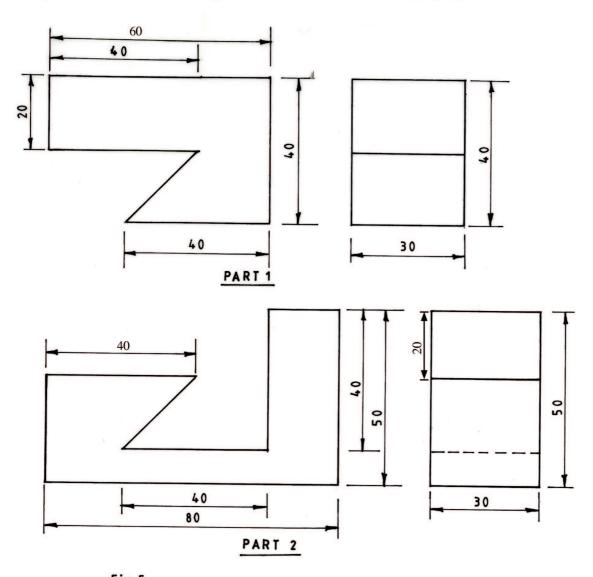


Fig. 5
Assemble the parts and sketch in good proportion the oblique projection of the block.
(5 marks)

SECTION B (20 marks)

COMPULSORY QUESTION.

- **Figure 6** shows parts of a machine component drawn in first angle projection. Assemble the parts and draw FULL SIZE the following:
 - (a) sectional front elevation along the cutting plane P P;
 - (b) the plan;
 Hidden details are not required. Unspecified dimensions are left to the candidate's discretion.

MANYAM FRANCHISE

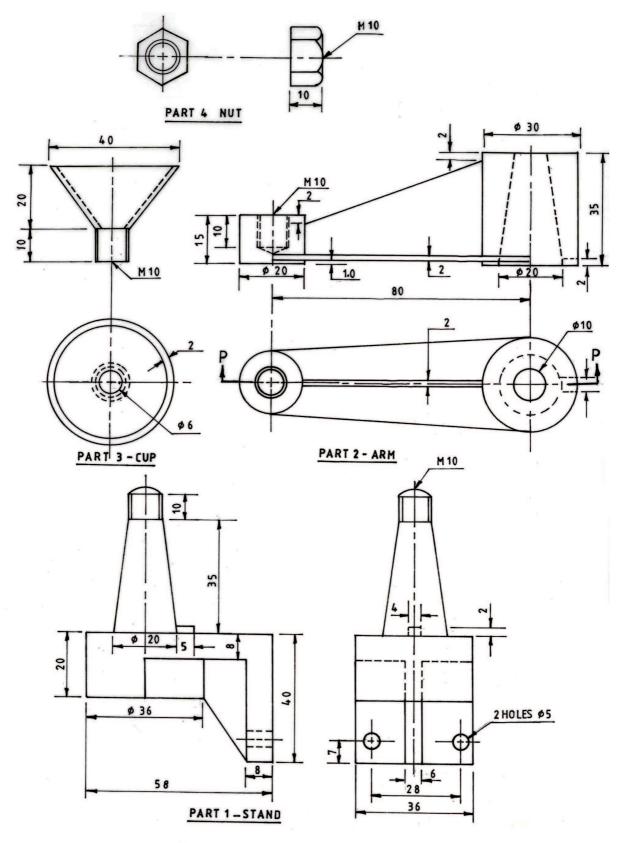


Fig. 6



SECTION C (30 marks)

Answer any two questions from this section.

- Figure 7 shows the front elevation of a truncated hexagonal prism tilting at an angle of 30°. Copy the given view and draw the following in third angle projection:
 - (i) end elevation in the direction of arrow E;
 - (ii) the plan.

(15 marks)


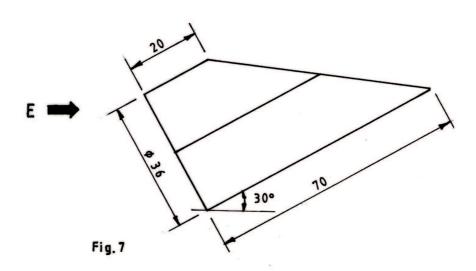


Figure 8 shows the plan of an object. A string attached to its circumference is wound tight.


Trace the path followed by a mark P on the string as it unwinds through one revolution.

(15 marks)





14 Figure 9 shows a block drawn in isometric projection.

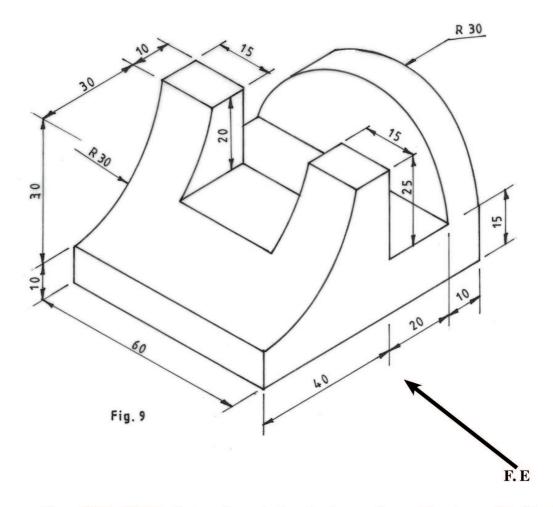

Draw FULL SIZE in first angle projection the three orthographic views of the block. (15 marks)

3.21.2 Drawing and Design Paper 2 (449/2)

DESIGN PROBLEM: (40 marks)

People have had serious accidents caused by the use of ladders that are poorly designed.

Design a ladder considering the following:

- 1. It should provide a reasonably strong grip when leaning on a cylindrical column.
- 2. It should have rungs (steps) that make the user comfortable when working.
- 3. It should have provision for extension as the working height increases.
- 4. It should be folded for ease of storage and transportation.
- 5. Its base should provide a firm grip to the ground.

REQUIREMENTS

(a) Make freehand sketches of **TWO** possible solutions for your design.

(6 marks)

(b) Select **ONE** of the designs in (a) above and make a refined labelled pictorial sketch.

(9 marks)

- (c) Make detailed sketches of the mechanisms to allow for each of the considerations 1 to 5 above. (20 marks)
- (d) List **TWO** materials used and state **ONE** reason for the choice of each.

(3 marks)

(e) Name **TWO** methods of joining the parts and state where each is used.

(2 marks)

